
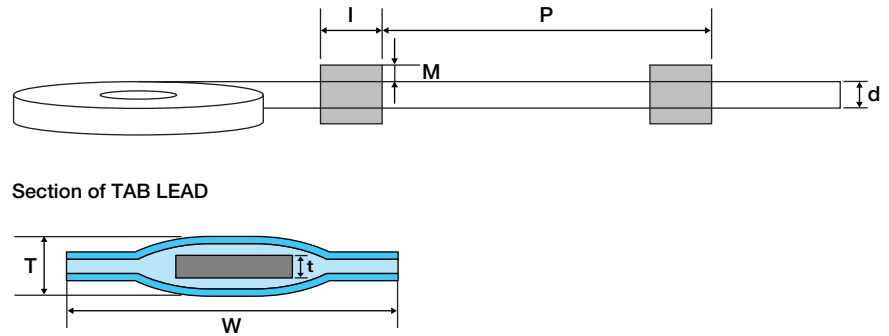


TAB-LEAD

RoHS Directive							
Lead Free	Hg Free	Cd Free	Cr ⁶⁺ Free	PBB Free	PBDE Free	PVC Free	Halogen Free

Constructions

Item		PLUS LEAD	MINUS LEAD
Conductor		Aluminum (Surface treatment non-Cr)	Nickel Nickel (Surface treatment non-Cr) Nickel plated copper (Surface treatment Cr ³⁺)
Insulation	Heat resistance layer	Heat resistant PP (Gray)	
	Adhesive layer	Modified PP (Melting point : PP=140°C)	
Shipment form		Reel · · · hole diameter for the shaft : 100mm, outer diameter : 400mm	

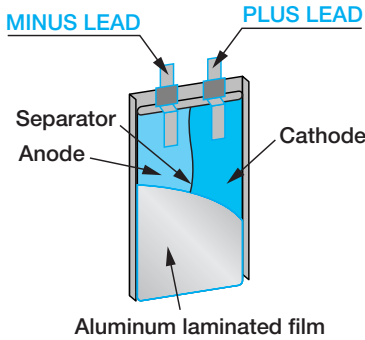

Nominal Dimension

Unit : mm


Item	Dimension					
Conductor width (d)	2.0	3.0	4.0	5.0	7.0	10.0
Conductor thickness (t)	0.1	0.08, 0.1				
Margin width (M)	1.0, 1.5, 2.0			2.0		
Total thickness (T)	Standard	t + 0.2				
	F type	t + 0.14				
	SF type	t + 0.12				
Insulation pitch on the conductor	Min. 20					
Insulation length (l)	4.0~15.0					
Insulation width (W)	d + (M×2)					

NomenClature

Example)

PLUS LEAD-0.08×4.0(ALF-O)×1×50-P8.0-PP(7.5)-COIL

MINUS LEAD-0.08×4.0(NI-O)×1×50-P8.0-PP(7.5)-COIL

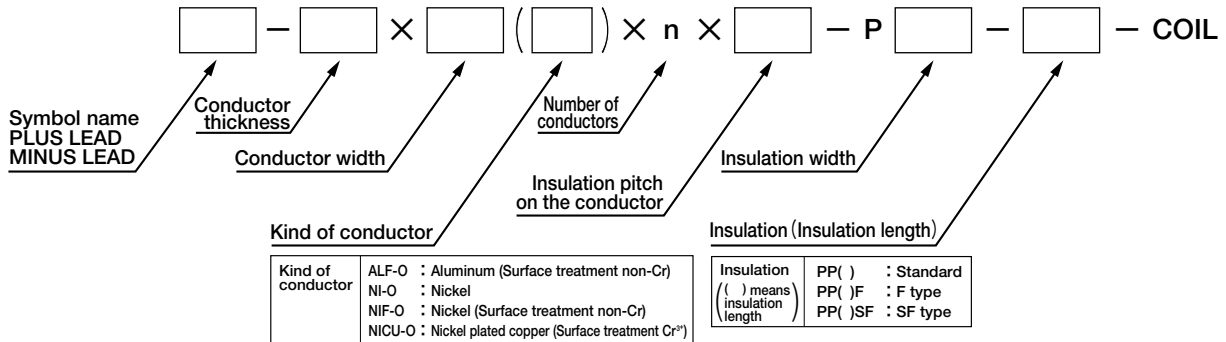

※This product is not suitable for automobile application in some cases. Please contact our sales office before you use this product.

※This specification is subject to change without a prior announcement.